


SCMS7D43AY



SMD POWER INDUCTORS



- Features
 - 1. Magnetically shielded construction – Low EMI
 - 2. Excellent Power Density
 - 3. Engineered to Provide High Efficiency

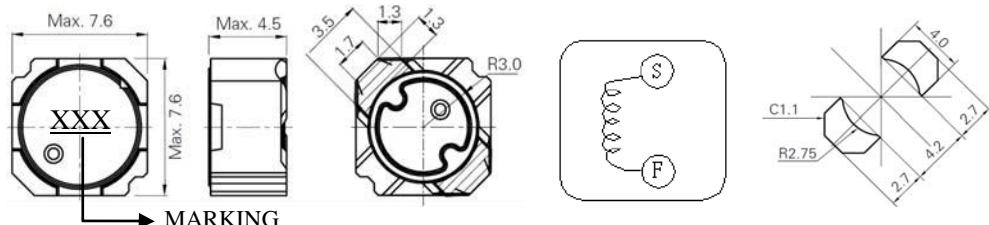

ELECTRICAL CHARACTERISTICS

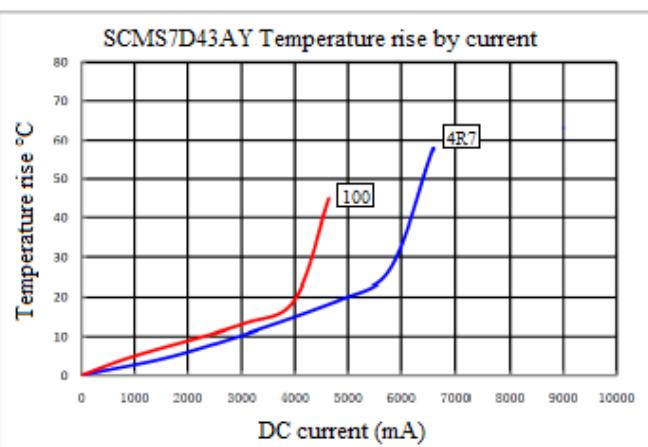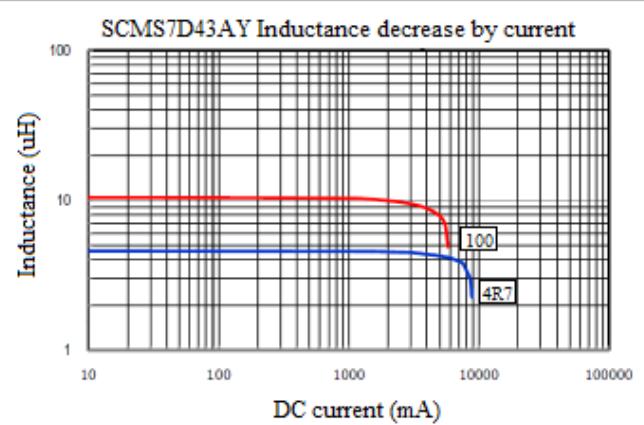

- (1). Inductance tolerance $\pm 30\%$ tested at 1V, 0ADC and 25°C.
 - (2). DCR measured at 25°C.
 - (3). The DC current at which the inductance decreases by 35% from its initial value.
 - (4). The DC current that results in a 40°C temperature rise from 25°C ambient.

Click here for QUANTITY PER REEL & PACKING INFORMATION
Custom versions available upon request.